


The Ultimate Condensate Management System

The AguaGuard AG-1250E, when combined with the AquaGuard AG-9100 External Audible & Visual Remote Alarm, is the ultimate condensate management system for any application.

AG-1250E + AG-9100 Alarm Features:

- The AquaGuard AG-1250E is a multipurpose water sensor that can be mounted directly on HVAC/R units, in a metal or plastic secondary drain pan, on floors or even on a wall.
- AG-1250E automatically shuts off the HVAC/R unit and activates the AG-9100 External Audible & Visual Remote Alarm if any overflow is detected in as little as 1/16 inch of water.
- AG-9100 has a loud 103 decibel audible alert, with on/off switch, and five (5) bright white water detection LED lights.
- AG-9100 alarm can be mounted over 250 feet away from the AG-1250E multipurpose water sensor in a convenient or highly visible location.
- No need to go up into an attic, on a roof, or down into a basement to check on the status of the HVAC/R unit unlike competitors' products.

| PRODUCT | WIRING | DRIES EASILY | AUTOMATIC RESET | ALARM | 5 AMP |
|--------------------|---------------|--------------|-----------------|--|-------|
| AG-1250E + AG-9100 | Red or Yellow | Yes | Yes | Yes - Can be up to 250 feet away from unit | Yes |
| WET SWITCH | Yellow Only | No | No | Yes - Stationary | No |

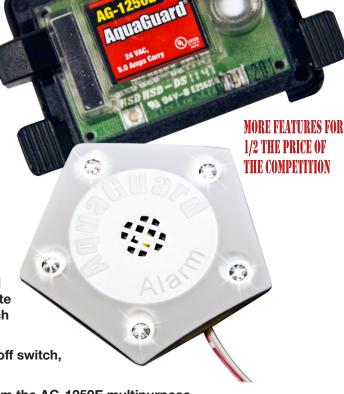

DRAIN PAN **SELECTION CHART**







| Secondary Pan Model | Pan Size I | | | Max Unit Size | | Recommended Application | | |
|------------------------|------------|--------------|---------------|------------------|--------------|----------------------------|--|--|
| Goliath Series | | <u>Width</u> | <u>Length</u> | <u>Height</u> | Width | <u>Length</u> | | |
| | 30x50 | 28.38" | 50.50" | 5.25" | 25.38" | 54.25" | Hangable | |
| | 30x62 | 28.25" | 69.13" | 4.25" | 26.0" | 66.50" | When additional clearance is need under air handler for drain. General Purpose for both furnac | |
| | 28x57 | 30.25" | 57.25" | 4.0" | 27.25" | 47.50" | | |
| | 28x69 | 30.38" | 63.0" | 4.25" | 27.38" | 60.0" | and air handler installation. | |
| Goliath Low Profile | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 26x56 | 56.63" | 26.50" | 2.75" | 23.50" | 53.63" | Hangable When space is at a minimum in a garage or attic. | |
| | l . | | | | | | | |
| Goliath Furnace Series | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 30x36 | 30.50" | 37.50" | 3.0" | 27.50" | 34.50" | Non-Hangable For Vertical, upflow installation of furnace or air handler. | |
| Goliath Furnace Series | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 34x64 | 34.13" | 64.13" | 7.50" | 31.13" | 61.13" | Non-Hangable When greater clearance height | |
| | 34x79 | 33.75" | 79.0" | 7.50" | 30.75" | 76.0" | is needed to accomodate piping under furnace. | |
| | | | | | | | | |
| Spartan Non-Hangable | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 30x50 | 30.25" | 50.50" | 4.0" | 27.25" | 47.5" | Non-Hangable General purpose for air handle installation. | |
| | 30x62 | 30.38" | 63.0" | 4.25" | 27.38" | 60.0" | | |
| | | | | | | | | |
| Titan Flexible Series | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 24x24 | 24.0" | 24.0" | 2.25" | 20.0" | 20.5" | | |
| | 26x26 | 26.0" | 26.0" | 2.25" | 22.0" | 22.5" | Non-Hangable Flexible and durable enough to | |
| | 30x30 | 30.0" | 30.0" | 2.25" | 26.0" | 26.5" | bend and fit into tight spaces. | |
| | 32x32 | 32.0" | 32.0" | 2.25" | 28.0" | 28.5" | | |
| Titan Flexible Series | | <u>Width</u> | <u>Length</u> | <u>Height</u> | <u>Width</u> | <u>Length</u> | | |
| | 30x50 | 30.25" | 50.5" | 2.50" | 27.25" | 47.50" | Hangable | |
| | 30x62 | 30.38" | 63.0" | 2.50" | 27.38" | 60.0" | Flexible and durable enough bend and fit into tight spaces | |



Resource Conservation Technologies, Inc. P: 1-888-708-6622 • F: 1-941-708-5200

www.rctus.com