

Engineered to perform in the harshest conditions.



Hazardgard®

HAZARDOUS LOCATION ROOM AIR CONDITIONERS



FRIEDRICH

1 8 8 3

50 | 60
HERTZ

UL LISTED for CLASS 1, DIV 2, GROUPS A, B, C and D.
CERTIFIED in accordance with ISA 12.12.01 and NFPA 70
(NATIONAL ELECTRIC CODE), ANSI/UL 484 Room Air Conditioners
KSA registered model tested in accordance with SASO 2681

THE EXPERTS IN ROOM AIR CONDITIONING

Hazardgard®

Engineered to perform in the harshest conditions.


Hazardgard meets T4 temperature classification

- Unit surface temperatures will not rise above 135° C/275° F.
- Operates at low ambient conditions without freezing at outdoor ambient temperatures as low as 7° C/45° F.
- Tolerates higher outdoor temperatures up to 55° C /130° F.



For more than 30 years, industrial professionals have trusted Hazardgard® to deliver safe and reliable cooling in the most extreme conditions. Hazardgard is specifically designed to cool laboratories, control rooms, living quarters, storage areas and other enclosures situated in hazardous locations where specific volatile flammable liquids or gases are handled or used within enclosed containers or systems.

Hazardgard® is rated for these conditions:

| Model | Hazardous Location Classification: Gases | |
|--|---|---|
| SH15M30A SH20M30SA SH20M30B SH20M50A SH24N20 | National Electrical Code, NFPA 70 ARTICLE 501: Class 1, Division 2, Group A / B / C / D , Temperature Class T4 / T4A* ARTICLE 505: Class 1, Zone 2, Group II C / IIB / II A , Temperature Class T4 / T4A* |  |

* T4A Temperature classification for dual frequency (50 / 60 Hz) models - SH24N20

For global applications, Hazardgard cooling capacities are tested in a certified laboratory at moderate (T1) and hot (T3*) climate conditions in accordance with SASO (Saudi Arabian Standards Organization) Standard 2681. SASO Standard 2681 is adopted from ISO Standard 5151 for testing and rating for performance of non-ducted air conditioners and heat pumps. Model SH20M30SA is KSA Registered in accordance with SASO2681 and meets SASO 2663 Energy Efficiency standard.*

The Friedrich Advantage Reliable Design Backed by Robust Engineering

Quality

Friedrich is an established player in the air conditioning industry and is known for manufacturing quality products.

Product Reliability

Used across the globe, Hazardgard is a tested and reliable product and not a quick-fix, job shop alteration.

Durability

Robust engineering, commercial-grade components and extensive field testing provide the durability and safety required in hazardous locations.


Availability

Off the shelf models allow for efficient manufacturing, shorter lead times and standardized component parts.

FEATURES

Durability & Reliability

- **Permanent split capacitor motor**
- **Hermetically sealed refrigeration system**
- **Environmentally sealed on/off switch and gold plated contacts** in thermostat for corrosion resistance
- **Solid-state control relays** for compressor and fan operation
- **Commercial grade, enclosed fan motor with hermetically sealed overload** for arc-free operation
- **Direct-wired** (field supplied), 15-amp circuit with time delay fuse that will tolerate current surge without tripping the breaker
- **Powder Coated 22-gauge, G60 steel air conditioner cabinet** for corrosion protection and to withstand years of hard use
- **Stainless Steel Fan Shaft**
- **Coated Coils** for Corrosion Protection



Performance in Extreme Conditions

- **Hot gas bypass** for cooling operation at low ambient temperatures, down to 45°F / 7°C without freezing
- **Hermetically sealed reciprocating compressor** is cooled during the refrigeration cycle, which allows the unit to tolerate higher outdoor temperatures up to 130°F (55°C)

Coated Coils for Corrosion Resistance

ElectroFin® 5-stage, immersion ecoat process, or Diamonblue Advanced Corrosion Protection® on 100% of metallic surfaces on the outdoor coil provides outstanding corrosion resistance protection and extends the life of the unit, especially in coastal or corrosive environments.

Diamonblue Advanced Corrosion Protection®

STANDARD ON ALL MODELS (except SH24N20, see below)

- Anti-corrosive, hydrophilic coating

ElectroFin® 5-stage, Immersion Ecoat Benefits:

MODEL SH24N20 ONLY

- Excellent adhesion characteristics
- Less than 1% thermal degradation
- Outstanding chemical resistance
- Passed 6048 hrs.ASTM B-117 Salt Spray

MEETS THE FOLLOWING:

- MIL-C-46168 Chemical Agent Resistance -DS2, HCl Gas
- CID A-A-52474A (GSA)
- MIL-STD 810F, Method 509.4 (Sand and Dust)
- MIL-P-53084 (ME)-TACOM Approval
- MIL-DTL-12468 Decontamination Agent (STB)
- DPG (Douglas Proving Grounds) Soil & Water Exposure Tests
- GM9540P-97 Accelerated Corrosion Test (120 cycles)
- ASTM B117-G85 Modified Salt Spray (Fog) Testing-2,000 hours
- ASTM B117 Salt Spray (tested by ARL for Lockheed Martin)


DIAMONBLUE
Advanced Corrosion Protection®



5-STAGE ecoat
Corrosion Protection



Engineered to perform in the harshest environments

- Offshore oil rigs, on-shore oil company offices and refineries
- Petrochemical sites and Propane fill-up stations
- Paint and varnish storage or processing plants
- Grain alcohol processors or storage sites
- Plant areas using strong solvents or chemicals
- Munitions plants or armories
- PVC or plastics plants and processing points
- Recycling plants
- Furniture refinishing/stripping workshops
- Office complexes where methane is a by-product
- Hazardous materials storage

SPECIFICATIONS

| Model | Electrical Characteristics | | | | Circuit Rating Breaker or T - D Fuse Volts - Amps | Energy Efficiency Ratio EER | Moisture Removal Pints/ Hr | Air Circulation CFM | Refrigerant |
|-----------|-----------------------------|-------------|--------------|---------------|--|--------------------------------|-------------------------------|------------------------|-------------|
| | Cooling Capacity Btu/Hr. | Volts Rated | Cooling Amps | Cooling Watts | | | | | |
| 60 HERTZ | | | | | | | | | |
| SH15M30A | 14500/14000 | 230/208 | 6.9/7.5 | 1495/1443 | 250V-15 | 9.7/9.7 | 4.0 | 375 | R-410A |
| SH20M30B | 19000/19000 | 230/208 | 8.5/9.4 | 1965/1970 | 250V-15 (230V) / 250V-20 (208V) | 9.7/9.6 | 5.5 | 375 | R-410A |
| SH20M30SA | 19000/19000 | 230/208 | 8.5/9.4 | 1965/1970 | 250V-15 (230V) / 250V-20 (208V) | 9.7/9.6 | 5.5 | 375 | R-410A |
| 50 HERTZ | | | | | | | | | |
| SH20M50A | 19500/19100 | 240/220 | 9.8/10.3 | 2167/2156 | 250V-15 | 9.0/9.0 | 5.6/5.5 | 425 | R-410A |
| SH24N20 | 21000/20500 | 240/220 | 15.0/13.2 | 2600/2412 | 250V-30 | 8.1/8.5 | 7.0/7.0 | 360 | R-410A |

INSTALLATION INFORMATION

| Model | Dimensions Inches | | | | | | Window Width Inches | | In-Wall Installation Finished Hole Inches | | | Weight Lbs. | |
|-----------|-------------------|-----------|------------------------------|------------------------------------|-----------------------------|---------------------------|---------------------|------|---|----------|------------------------|-------------|----------|
| | Height | Width | Depth with Front A | Depth J Box to Louvers B | Minimum Extension Into Room | Minimum Extension Outside | Min. | Max. | Height | Width | Max. Depth C | Net | Shipping |
| SH15M30A | 15 15/16" | 25 15/16" | 27 3/8" | 6" | 3 1/16" | 16 15/16" | 27 7/8" | 42" | 16 3/16" | 26 3/16" | 6" | 140 | 167 |
| SH20M30B | 17 15/16" | 25 15/16" | 27 3/8" | 6" | 3 1/16" | 16 15/16" | 27 7/8" | 42" | 18 3/16" | 26 3/16" | 6" | 166 | 170 |
| SH20M30SA | 17 15/16" | 25 15/16" | 27 3/8" | 6" | 3 1/16" | 16 15/16" | 27 7/8" | 42" | 18 3/16" | 26 3/16" | 6" | 166 | 170 |
| SH20M50A | 17 15/16" | 25 15/16" | 27 3/8" | 6" | 3 1/16" | 16 15/16" | 27 7/8" | 42" | 18 3/16" | 26 3/16" | 6" | 171 | 175 |
| SH24N20 | 17 15/16" | 25 15/16" | 27 3/8" | 6" | 3 1/16" | 16 15/16" | 27 7/8" | 42" | 18 3/16" | 26 3/16" | 6" | 180 | 185 |


Due to continuing engineering research and technology, specifications are subject to change without notice.

U.S. MAXIMUM outdoor ambient operating temperature is 130°F. [55°C] MAXIMUM TEMPERATURE RATING FOR CLASS 1, DIVISION 2, GROUPS A, B, C, D.

Capacity and efficiency values at each climate conditions are available upon request.

NOTE: Hazardgard unit must be hard-wired.

Manufactured under Design Patent DES 368, 306 decorative front; Utility Patent 5, 662, 058.

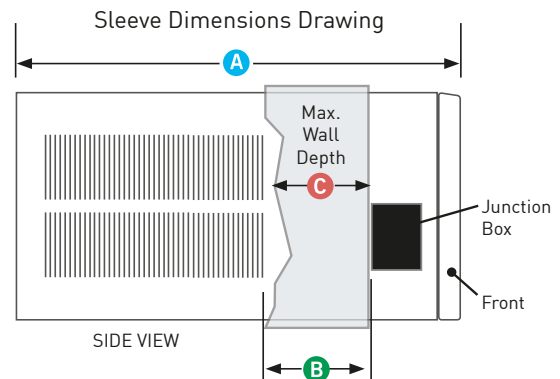

Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216 | 877.599.5665 | www.friedrich.com