

## INSTALLATION IS EASY!

With the FrostGuard Plug-n-Play heating cable, there is no need to wire the product to the power supply. Simply plug and go!

### ROOF INSTALLATION INSTRUCTIONS

1. Calculate the length of the roof edge, eave overhang, gutter and downspout to determine the length of the cable you need.
2. Attach the heating cable to the roof with roof clips, cable ties and downspout hangers.
3. Run the heating cable along gutters and downspouts using a hanger bracket on the gutter/downspout transition (or two hanger brackets if looping)
4. Mark the installation with labels provided on the outlet cover and at the fuse or circuit breaker panel.
5. Plug FrostGuard into a ground-fault protected 3-prong electrical outlet.

#### TECHNICAL DATA

Nominal power	8 W/ft @ 32°F (0°C)
Voltage	120 V
Max. Exposure Temperature	150°F (65°C)
Min. Installation Temperature	5°F (-15°C)
Heating cable	Self-regulating cable with protective tinned-copper braid and outer polyolefin jacket
Approvals	cCSAus

#### PLUG-N-PLAY KIT CABLE LENGTHS

120 V Catalog #	Length	
	ft	m
FG1-6P	6	1.8
FG1-12P	12	3.7
FG1-18P	18	5.5
FG1-24P	24	7.3
FG1-36P	36	11
FG1-50P	50	15
FG1-75P	75	23
FG1-100P	100	30

For larger roof and gutter de-icing jobs, use our cut-to-length WinterGard Wet product.

## ASSOCIATED PRODUCTS

Catalog #	Product Description
H913	Roof Clips (10 ea)
H914	Roof Clips (50 ea)
H915	Downspout Hanger Bracket

## ALSO AVAILABLE FOR PIPES

The FrostGuard Plug-n-Play kit is so versatile, that you can install it on water pipes to prevent unnecessary costly repairs associated with frozen or burst pipes.

For more information, refer to H59697, or visit [www.pentairthermal.com](http://www.pentairthermal.com)

**Raychem**

♥ WINTER



[WWW.PENTAIRTHERMAL.COM](http://WWW.PENTAIRTHERMAL.COM)

#### NORTH AMERICA

Tel: +1.800.545.6258  
Fax: +1.800.527.5703  
Tel: +1.650.216.1526  
Fax: +1.650.474.7711  
[thermal.info@pentair.com](mailto:thermal.info@pentair.com)

Pentair and FrostGuard are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2016 Pentair.

@pentairTBS

Thermal Building Solutions

EN-RaychemFrostGuardRG-SB-H59866 08/16



FROSTGUARD ROOF  
& GUTTER DE-ICING



**Raychem**

**FROSTGUARD**  
KEEPS ROOFS AND GUTTERS WINTER SAFE

Thermal Building Solutions

[WWW.PENTAIRTHERMAL.COM](http://WWW.PENTAIRTHERMAL.COM)

# PREVENT ICE DAMS AND FROZEN GUTTERS

WHEN WINTER BRINGS SNOW AND ICE

Ice buildup, icicles and standing water from melting snow can cause severe damage to your roof and gutter, leading to costly structural damage or injury.




## WHAT IS FROSTGUARD?

Raychem FrostGuard is an energy-efficient preassembled heating cable used to protect roofs and gutters from the harm that winter brings.

FrostGuard is available as a Plug-n-Play Kit (120 V) and its self-regulating heating cable delivers just the heat that is needed.

### SELF-REGULATING TECHNOLOGY

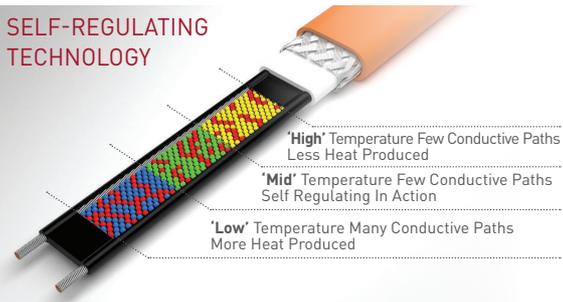

The simple Plug-n-Play system is ideal for residential and small commercial buildings and requires no specialist electrical knowledge. Simply fix to the roof, gutters and downspouts and plug into a ground-fault protected electrical socket. It is that simple.



Raychem



LIGHTED PLUG TO SHOW THE SYSTEM HAS POWER

## FEATURES

### PLUG-N-PLAY KIT

- Preassembled with a 6-ft power cord
- 3-prong, grounded, lighted plug to show the system has power
- No need for an electrician to wire the product to the power supply
- Ideal for smaller jobs such as roof and gutter de-icing on porches and overhangs
- Can be used on roofs made from all types of materials, including shake, shingle, rubber, tar, wood, metal and plastic
- Available in 8 lengths in 120 V
- Can be overlapped
- Quick and easy installation, simply plug and go!



## VERSATILITY

The incredibly versatile FrostGuard heating cable kit can be used for roof and gutter applications, including:

- Small roofs
- Porches
- Overhangs
- Any application requiring 100 feet of heating cable or less