Steam-Rated Commercial Grade Condensate Pumps

Model SC-1A Series Pumps

BENEFITS

- Rated for 2,000 EDR; 480,000 BTU
- **♦ Vapor sealed, 4 gallon cast aluminum reservoir**
- Steam rated for 2,000 EDR, 480,000 BTU
- Max temperature to 212°
- Stainless steel float

Hartell's steam-rated condensate pump is designed expressly for the automatic return of condensate to a collection point where radiation has been added to existing systems below the return.

FEATURES

- Inlet: 1-1/2" FNPT, Outlet: 3/4" FNPT
- Integral junction box
- Usable lifts over 40 ft
- Dual voltage motor
- Heavy duty design for industrial applications

DATA SH	EET
---------	-----






	Model	Part No.	Aux. Switch	hp@rpm	Voltage	Full Load Amps	Performance							Dimensions			
Γ	SC-1A	851068	N	1/2@ 3450	115/230	7.46/3.7	Lift/Feet	6'	12'	18'	24'	36'	45'	Width	Length	Height	Weight
1	30-1A						Gallons/hr	4200	3780	3420	2820	1800	-	12" 30.4cm	12" 30.4cm	19" 48.2cm	45lbs 20.4kg
	SC-1AX	851123	V				Lift/Meter	1.8m	3.6m	5.5m	7.3m	10.9m	13.7m				
L	SU-TAX	001123	ī				Liters/hr	15898	14308	12946	10674	6813	-				



Steam-Rated Commercial Grade Condensate Pumps


Model SC-1A Series Pumps





TOP VIEW







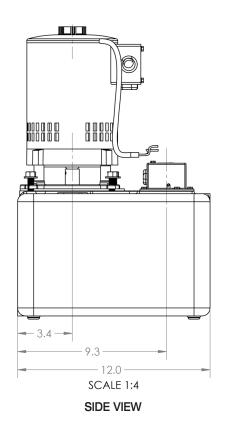

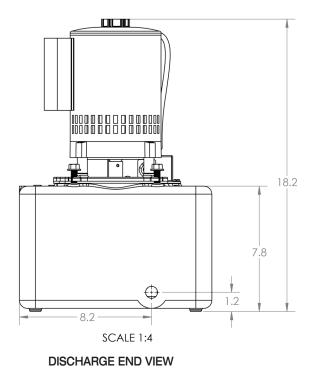

HARTELL