

HVAC/R

BOSS® 136 Fireblock/Draftstop Sealant

Residential Construction

A noncombustible sealant for use as a filler in a nonrated construction where a fire and smoke seal is required.

- Use for insulating around pipes, cables and blank openings, gaps and cracks
- Weatherproofs against wind and moisture
- Can be cut, sanded and painted

Tested to UL 136 (ASTM E-136), meets IRC, UBC, CABO, BOCA (NBC) 602.7, Item 4, 1995 edition

Cartridge 13605 Red
Sausage 20 Oz. 13620 Red
Quart Cartridge 13629 Red
4.5 Gallon Pail 13650 Red



BOSS® 816 Intumescent FireStop Sealant

Residential & Commercial

UL Classified. An intumescent sealant with excellent resistance to vibration. Designed for penetration sealing around pipes, ducts, vents, conduits, joints, wires and cables.

- Excellent adhesion, mildew resistant
- Intumesces rapidly to close off voids caused by heat or fire
- VOC Compliant
- Paintable (after inspection)

Not for use around fire dampers.

Listed & Tested to UL 1479 (ASTM E-814), meets IRC, UBC, CABO, BOCA (NBC), IBC

Cartridge 81610 Red
Sausage 20 Oz. 81620 Red
Quart Cartridge 81629 Red
4.5 Gallon Pail 81650 Red



BOSS® 760 Silicone FireStop Sealant

Residential & Commercial

UL Classified. Neutral cure silicone that sustains constant vibration, seismic and thermal shock. Excellent for perimeter sealing around fire dampers, pipes, conduits and electrical cables. Will not intumesce.

- Interior/ exterior use
- Remains flexible
- Excellent adhesion to most substrates

Listed & Tested to UL 1479 (ASTM E-814), meets IRC, UBC, CABO, BOCA (NBC), IBC

Cartridge 76010 Red
Sausage 20 Oz. 76020 Red
Quart Cartridge 76029 Red
4.5 Gallon Pail 76050 Red



BOSS® 350 Fire Retardant Duct Sealant

Residential Construction

A high performance duct sealant designed for use in high, medium or low velocity heating and air conditioning systems. Provides excellent strength, flexibility and resistance to heat and cold, forming a seal against air leakage.

- Paintable
- VOC compliant
- Water cleanup

Tested to UL 723 (ASTM E-84), Flame Spread-0, Smoke Developed-0 Item 4, 1995 edition

Cartridge 35003 Gray



Cradle Caulk Gun M0016



Foil Gun-Threaded Metal Tip M0098



Caulk Gun M0017
Quart Caulk Gun M0064



Foil Gun-Plastic Tip M0051




BOSS® PRODUCTS manufactures market specific foams, sealants, and adhesives for the professional trades.
BOSS® PRODUCTS IS NOT SOLD IN BIG BOX STORES!

BOSS is a registered trademark of Soudal Accumetric
HVAC/R / 072017

BOSS® PRODUCTS

SILICONES ADHESIVES LUBRICANTS FOAMS WIPES

MADE TO WORK®

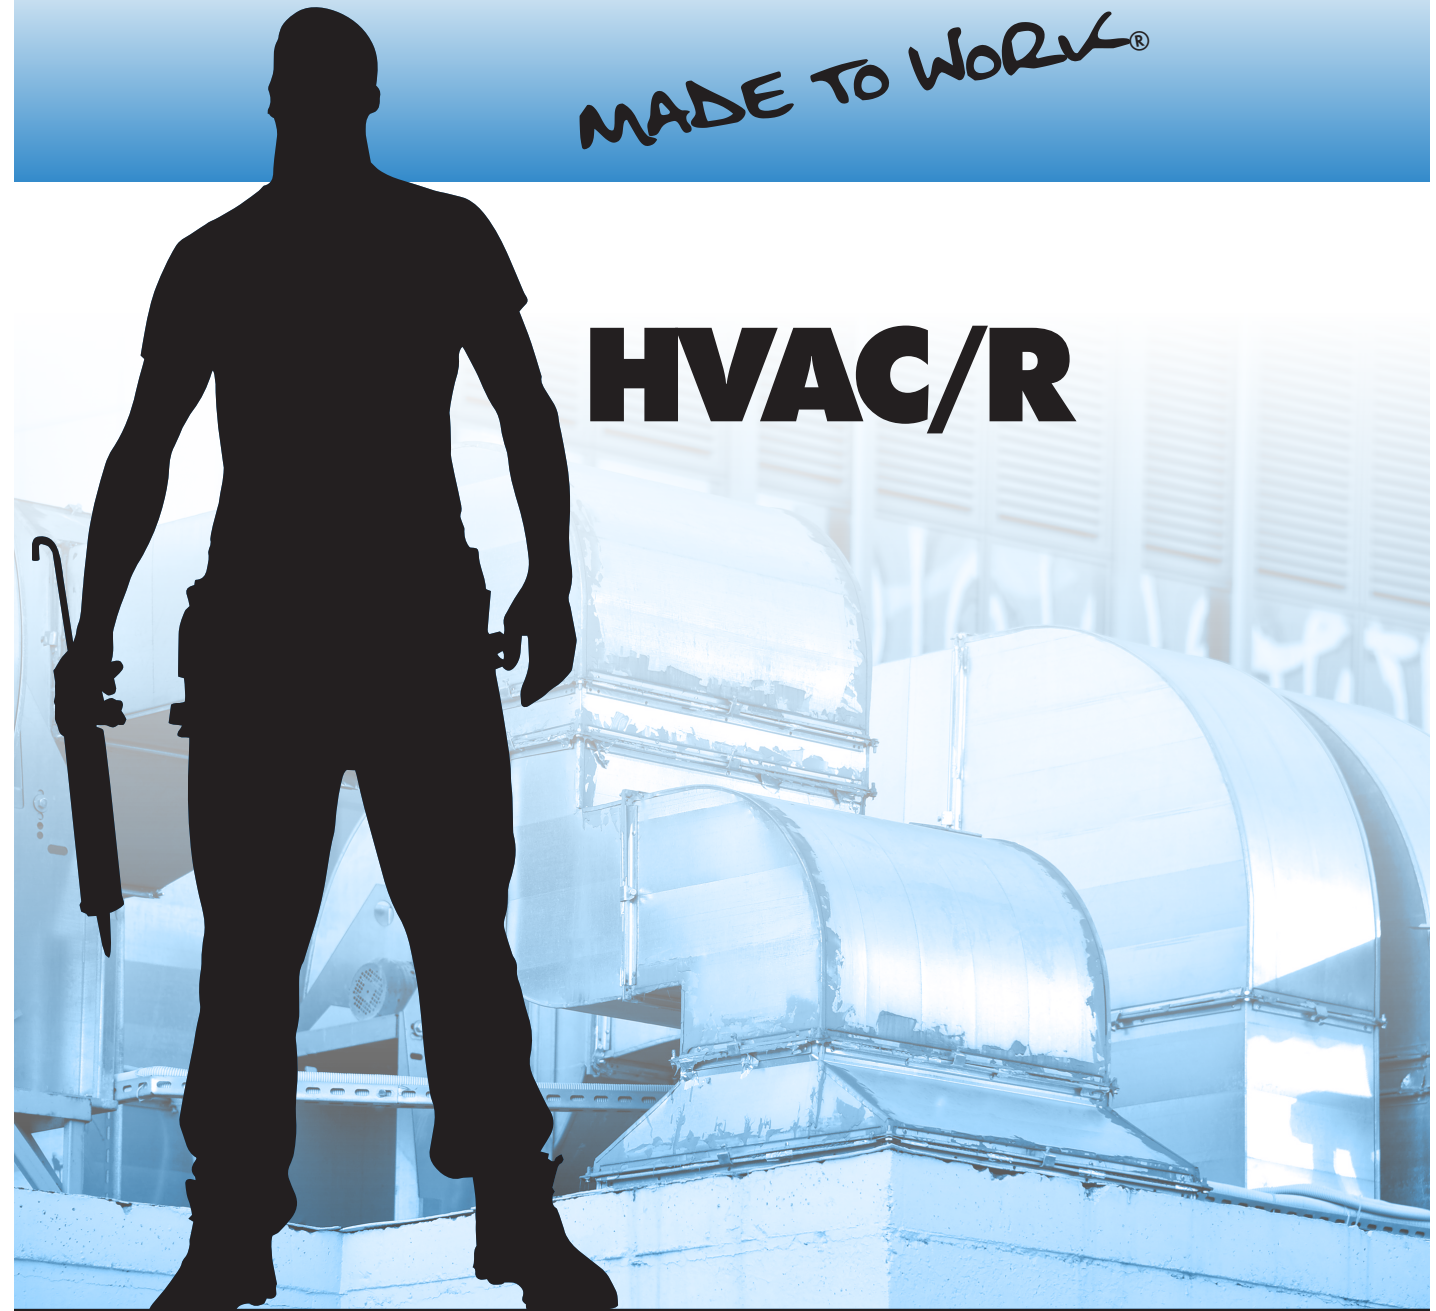

HVAC/R

Call the **BOSS® 800-928-BOSS**

WE DEVELOP IT! WE MAKE IT! WE CERTIFY IT!



BOSS® PRODUCTS • 350 Ring Road, Elizabethtown, KY 42701, USA • 270-769-3385 • 800-928-2677 • FAX 270-765-2412 • www.bossproducts.com

HVAC/R

BOSS® 312 NSF/FDA RTV Silicone Adhesive/Sealant

A paste like, one component acetoxy silicone adhesive/sealant that cures to a tough, rubbery solid when exposed to moisture in the air.

- Will not shrink, sag, slump or run off
- Excellent in overhead & vertical joints

Temp Range: -40°F to 400°F

Specs: TT-S-00230C; TT-S-001543A; ASTM C-920; FDA 21-CFR 177.2600; NSF 51; UL Recognized

Cartridge

31200 Clear / 31201 White / 31202 Black / 31203 Aluminum
4.5 Gallon Pail
 31270 Clear / 31271 White / 31272 Black / 31273 Aluminum



BOSS® 370 HVAC/R RTV Silicone Adhesive/Sealant

A paste like, one component acetoxy silicone adhesive/sealant that cures to a tough, rubbery solid when exposed to moisture in the air.

- Seal heating, ventilating or air conditioning duct work
- Seal cracks and gaps around ducts, pipes, vents and fixtures

Temp Range: -40°F to 400°F continuous

Specs: TT-S-00230C; TT-S-001543A; ASTM C-920

Cartridge

37000 Clear / 37001 White / 37002 Black / 37003 Aluminum
Pressurized Aerosol Can 37008 Clear



BOSS® 326/376 Hi-Temp Red RTV Silicone

Provides a protective coating or gasket where parts must perform at temperatures up to 500°F.

- Used in critical bonding, sealing, potting and encapsulating applications
- Excellent resistance to weather, temperature extremes, and caustic environments

Temp Range: -85°F to 500°F

Specs: TT-S-00230C; TT-S-001543A; ASTM C-920; NSF 51; UL Recognized

Cartridge

37610
Pressurized Aerosol Can 37608
Tube 3 Oz. 32603



BOSS® 362 100% Acrylic Tub 'N' Tile Caulk

This was developed for use around showers, tubs, tiles, toilets, backsplashes and sinks as well as baseboards, door frames, crown moulding and any joint where a watertight seal is needed.

- Low temperature flexibility
- Paintable, mildew resistant, non-yellowing
- Soap and water clean up before cure

Tube

36250 Clear / 36251 Bright White
 36255 Almond / 36273 Biscuit/Bone
Cartridge 36201 Bright White



BOSS® 368 Butyl Rubber Adhesive/Sealant

A one component skinning product for sealing standing seam roofs, flashings and side walls. Provides excellent adhesion to metal, asphalt, wood and masonry substrates.

- Filling cracks and joints around HVAC ducts, pipes and vents
- Excellent in sealing joints in sheet metal
- Compatible with and suitable for use on polyurethane foam and extruded polystyrene

Specs: TT-S-001657; TT-C-1796A, Type I, Class A. Meets FDA Regulation, food additives, sub-part F, sub-paragraph 175.105 being composed of ingredients acceptable for packing and transporting food. Acceptable to the U.S. Department of Agriculture for use in meat and poultry processing areas under Federal Inspection.

Cartridge

36801 White / 36802 Black / 36803 Grey

Quart Cartridge

36821 White / 36822 Black / 36823 Grey



BOSS® 333 Gap Filling Foam

A ready to use, multi-purpose, polyurethane foam that expands to three times its original volume upon contact with air.

- Use for insulating around pipes, cables and blank openings, gaps and cracks
- Weatherproofs against wind and moisture
- Can be cut, sanded and painted

Temp Range: -40°F to 200°F

R-Value: 4 to 5 per inch

Specs: ASTM E-84; UL 723:

Flame Spread-15,

Smoke Developed-35

Aerosol Gun Grade Can 24 Oz. 33325

Aerosol Genius Gun Can 20 Oz. 33320

Aerosol Straw Grade Can 12 Oz. 33316

Aerosol Straw Grade Can 24 Oz. 33324



BOSS® 334 Minimal Expanding Foam

Formulated with CFC free propellant.

A one component, self expanding, ready to use polyurethane foam, with a plastic adaptor head for use with a foam applicator gun which contains foam propellants which are completely harmless to the ozone layer.

- Filling of cavities
- Creation of a soundproof screen
- Installing of window and door frames
- Sealing of all openings in roof construction
- Mounting and sealing of window and door frames
- Connecting of insulation materials and roof construction
- Application of a soundproofing layer on motors
- Improving thermal isolation in cooling systems
- AAMA 812-04 Approved

Aerosol Straw Grade Can 12 Oz. 33412

Aerosol Genius Gun Can 20 Oz. 33420

Aerosol Gun Grade Can 24 Oz. 33424



HVAC/R

BOSS® 125 Multi-Seal® Roofing, Gutter, Concrete Construction Sealant

A multi-purpose, one part sealant, formulated with USP™ Technology to form a highly durable, flexible seal. This unique sealant offers outstanding primerless adhesion to most common building materials including vinyl, aluminum, steel, concrete, wood and glass.

- All weather plastic cartridge
- Applies the same in all seasons
- Bonds to wet, damp surfaces
- VOC Compliant
- Paintable under an hour*

Temp Range: -40°F to 200°F

Specs: TT-S-000230C, Type II, Class A, ASTM C920, Type S, Grade NS, Class 25, Use NT-non traffic, G-glass, M-mortar, A-aluminum and O-other, CAN/CGSB 19.13-M87

Cartridge

12501 White / 12502 Black / 12503 Grey / 12507 Limestone / 12513 Aluminum Grey
 12514 Hunter Green / 12515 Medium Bronze / 12516 Off white
 12517 Redwood Tan / 12518 Stone / 12519 Tan / 12520 Special Bronze
 12521 Brown / 12522 Translucent / Also available in sausages, pails and drums
Pressurized Aerosol Can 12580 Translucent



BOSS® 150 Multi-Seal® Industrial, Cold Storage, Refrigeration, Construction Adhesive/Sealant

An interior/exterior one component adhesive sealant formulated with USP™ Technology. It demonstrates tenacious adhesion to most substrates while maintaining elasticity. Can be used as a sealant to bond similar/dissimilar materials and be used as a sealant in dynamic or static joints or seams.

- VOC compliant (solvent & isocyanate free formulation)
- Bonds to damp or non-porous surfaces
- NSF Registered for nonfood compounds
- Meets former USDA P1 guidelines for use in and around food processing areas
- Non-corrosive
- Paintable under an hour*

Temp Range: -40°F to 200°F

Specs: TT-S-000230C, Type II, Class A; ASTM C920, Type S, Grade NS, Class 25, Use NT, G, M, A and O; CAN/CGSB 19.13-M87.

Cartridge

15001 Polar White / 15002 Pitch Black / 15003 Stainless Steel
 Also available in sausages, pails and drums



BOSS® 891 Hand Cleaner with Lanolin

Specially formulated to quickly and easily remove oil, grease, grime and stains without damaging the skin.

- Removes paints, grease, oil, dirt, adhesives and sealants
- Not harmful to skin, contains lanolin
- 12 bottles / case

Inverted Bottle 15 Oz. 89100



BOSS® 348 Construction/Multi-Purpose Adhesive

A premium quality, waterproof adhesive specially designed for the bonding and installation of all types of plastic foams and polystyrene. When used as directed it will not attack polystyrene or other plastic foams. Adhesive forms a "bridge" between the panel and the bonding surface with a strong yet flexible bond. It will not cause any staining, bleeding or blistering effect.

- Fast, easy to use, easy clean up
- Reduces sound transmission
- Fast grab, sets up quickly
- VOC Compliant

Cartridge 34800 Light Tan



BOSS® 635 Spray Adhesive

This spray combines a uniform misting spray pattern with super high solids to create a fast tacking and high bond strength.

- VOC Compliant
- Nonchlorinated
- Great for adhering insulation board to duct work
- Adheres well for placement of signs and instructions to your work

Aerosol Can 12 Oz. 63512



BOSS® 812 Fire Block Foam

A ready to use foam designed to prevent the spread of smoke and toxic gases from one compartment to another, thereby slowing down the spread of fire. Can be used to seal around copper, PVC and wastewater pipes, as well as conduit and duct work.

- 360° dispensing
- Installs in seconds, potentially reducing labor costs by up to 90%
- Ideal for single and two family homes
- Paintable (after inspection)

Temp Range: -40°F to 200°F

Specs: Tested to UL 723 (ASTM E-84); Flame Spread-15

Smoke Developed-35, NFPA 255 Class A

Aerosol Straw Grade Can 12 Oz. 81212

Aerosol Gun Grade Can 24 Oz. 81220

Aerosol Genius Gun Can 20 Oz. 81221

Also available in a **Starter Kit** 812KIT



BOSS® 892/893/894 Industrial Hand Wipes

Specially formulated hand wipes designed to quickly and easily remove oil, grease, grime and stains without damaging the skin.

- Removes marker ink, paints, grease, oil, dirt, adhesives and sealants
- Not harmful to skin

Tubs

Dual Sided-Smooth/Abrasive Wipes 80 ct. 89300

Biodegradable Wipes 72 ct. 89400

Industrial Soft Cloth Wipes 100 ct. 89200



BOSS
 PRODUCTS

*Test small area for compatibility before painting, Translucent not paintable.